


# CRS/RPR "COMBO"

Your Source For Unparalleled Paralleling Solutions!

## **Standard Paralleling Reel Stands:**

- CRS48** 48" dia. X 32" wide X 5,000 lbs.
- CRS60** 60" dia. X 36" wide X 5,000 lbs.
- CRS72** 72" dia. X 45" wide X 5,000 lbs.
- CRS96** 96" dia. X 60" wide X 10,000 lbs.
- CRS120** 120" dia. X 72" wide X 20,000 lbs.


*\*Shown with 2" shafts*

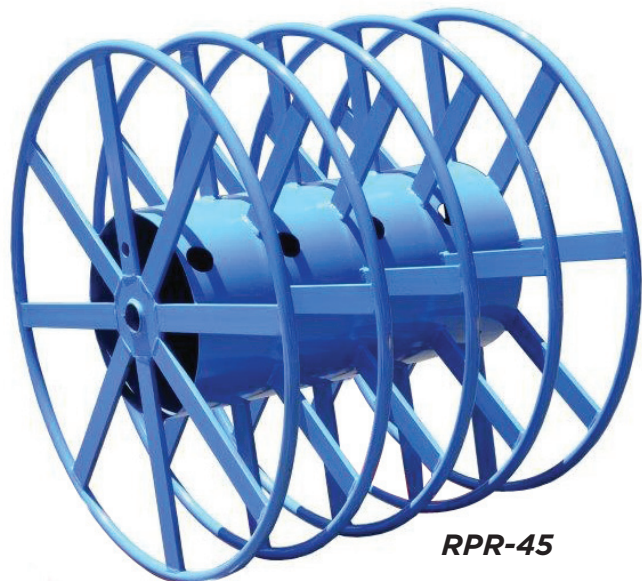

**RPR-45**



Reel-O-Matic's CRS/RPR Combo shown with a RPR-45 and an independent RPR-15 for a ground or smaller diameter wire and optional casters.

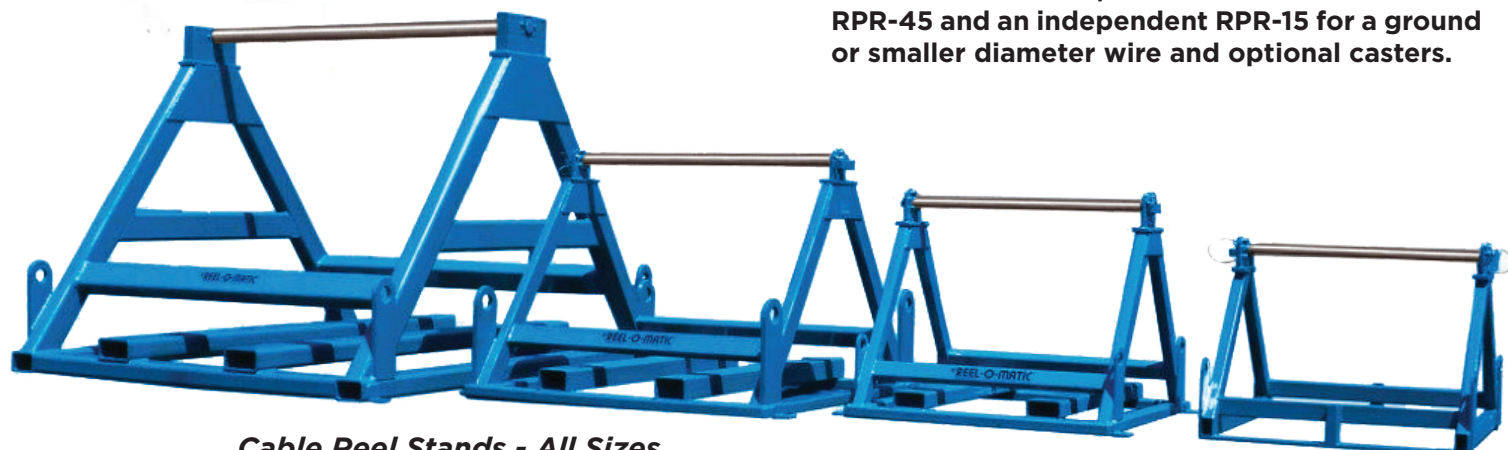

**Cable Reel Stands - All Sizes**

**REELPOWER**  
INDUSTRIAL

5101 S. Council Road, Suite 100 • Okla. City, OK. 73179  
405.672.0000 • 405.672.7200 Fax  
[www.reelpowerind.com](http://www.reelpowerind.com)

# CRS/RPR "COMBO"

Your Source For Unparalleled Paralleling Solutions!

The Reel-O-Matic Combo is constructed of all tubular welded steel. Our stands are complete with a 2" diameter solid steel shaft, cam roller bearings that allow for easy reel payout, shaft safety locks with locking pin and a maximum reel weight of 5,000 lbs. Load the reel(s) at your facility and deliver right to the job-site. The contractor can either manually roll the combo unit into place using our wheel/floor locking combination or simply move it with a forklift or pallet jack to begin the pull immediately. Set-up time is obsolete, simply start the "pull."

## Standard Paralleling Reel Sizes:

### RPR 35

40" diameter x 16" I.D. x 32" wide  
3 compartments x 700 ft.  
500 MCM per compartment

### RPR 45

40" diameter x 16" I.D. x 32" wide  
4 compartments x 500 ft.  
500 MCM per compartment

### RPR 55

40" diameter x 16" I.D. x 32" wide  
5 compartments x 350 ft.  
500 MCM per compartment



Optional 8" x 2" Polyurethane Wheels



Standard 2 1/8" Locking Reel Collar

## Reel Capacity Chart

THHN		RPR - 15	RPR - 35	RPR - 45	RPR - 55
Wire Size	OD in Inches	FT/Compartment	FT/Compartment	FT/Compartment	FT/Compartment
750 MCM	1.16	341	409	341	255
600 MCM	1.06	409	554	409	306
500 MCM	0.925	537	732	537	370
400 MCM	0.842	665	883	665	446
350 MCM	0.796	716	988	716	499
300 MCM	0.747	806	1122	806	567
250 MCM	0.694	979	1300	979	657
4/0	0.624	1152	1607	1152	812
3/0	0.568	1478	1940	1478	980
2/0	0.518	1913	2333	1913	1179
1/0	0.474	2150	2786	2150	1480



Standard Shaft Safety Locks

**REELPOWER**  
INDUSTRIAL

5101 S. Council Road, Suite 100 • Okla. City, OK. 73179  
405.672.0000 • 405.672.7200 Fax  
www.reelpowerind.com