


PARALLELING SHAFTED PAYOFF

SPRS6-3 Position Shafted Payoff

Accommodates reels 38" to 72" diameter and up to 45" wide

Overhead rollers to guide cables during paralleling

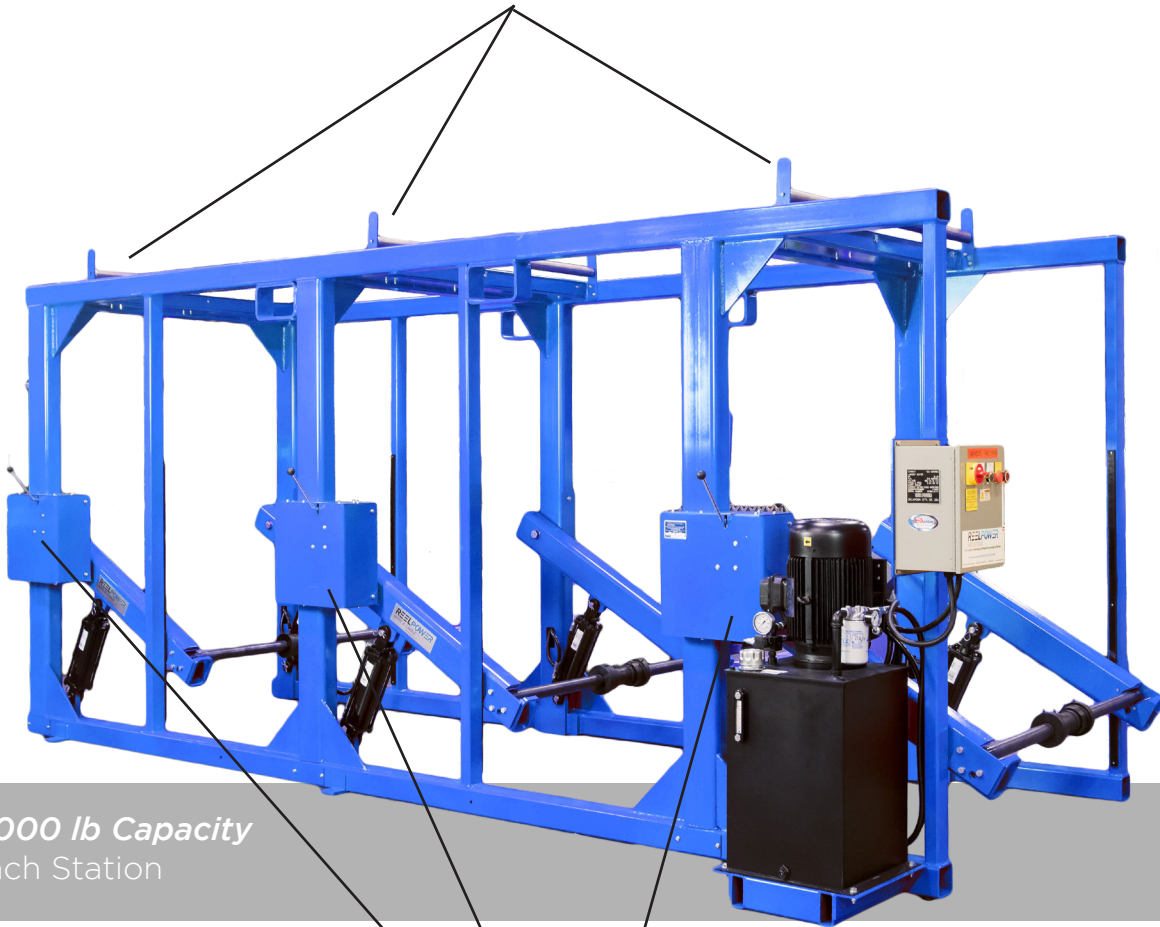

*6,000 lb Capacity
Each Station*

Three station individual rise-and-lower control

PARALLELING SHAFTED PAYOFF

SPRS6-3 Position Shafted Payoff



Hydraulic Lift with Control Panel

Standard Features:

- Electro-lift to raise and lower the reels by pushbutton with central hydraulic unit.
- Bushing storage
- Three (3) 2" reel shafts with 3" and 4" bushings
- Floor mounted base frame with easy approach for rolling reel directly in between arms and loading one, two or all three stations from one side, walk thru column design, stands are tied together with framework.
- Centering 6" fixed guide box attached to the top of frame work instead of rollers previously provided.
- 10" Mechanical disc brakes to help prevent reel over spin and provide tension during payoff process. Adding the brakes will increase overall width slightly by approximately 8" over (ILRSP6-001-01) previous unit.
- Shaft storage brackets
- Elongated shaft pocket with cam rollers
- UL508A Listed