ACT-36

Automatic Cut & Transfer - Coiling & Spooling

Equipment Benefits:

- Automatic Cut & Transfer
- Precision Military Winding
- Improved Production up to 1000 FPM
- Optional Automatic Stretch Wrap
- Precise Tension Control
- Lowest Maintenance
- No Belts, Gears or Pulleys
- Quiet, Fast, Smooth



Shown with full metal guard

Model ACT-36



The ACT System Offers:

- Higher standard speeds reaching 1000 fpm.
- Best available package quality with servo driven indexing turret and guide arm.
- Precise speed and tension control with optional dancer systems.
- Highly flexible and reliable, with application specific customization for on and offline wire, cable, medical tubing, and plastic profile applications.
- Innovative Flexible Material Spooling & Coiling Solutions
- Optional Traversing Stretch Wrap Cartridge up to 21" Wide
- Articulate Guide Servo Axis
- Replaceable Entrance Product Guide
- Superior safety with a standard 'S' guard isolating the operator from the run side, with optional half or full frame guarding and failsafe door interlocks.
- Custom cutter solutions engineered to match material type, diameter, and wall thickness.
- Configurable for flange or periphery cutting to match application requirements.

REELPOWER INDUSTRIAL


5101 S. Council Road, Suite 100 • Okla. City, OK. 73179
405.672.0000 • 405.672.7200 Fax
www.reelpowerind.com

ACT-36

Automatic Cut & Transfer - Coiling & Spooling

Available Options:

- Sampling Arm
- Automatic Coiling Heads
- Automatic Banding & Ejection
- Automatic Stretch Wrap
- Full Guarding (Metal or Lexan)

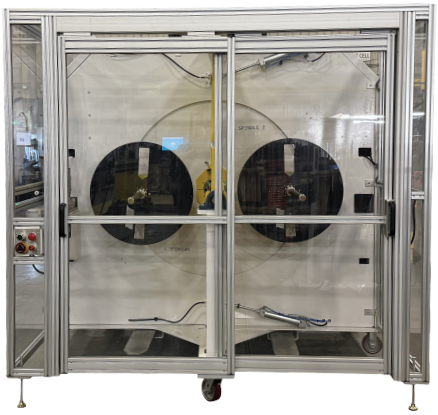

Lexan® polycarbonate guarding also available in place of metal doors for full visibility of the process.



Innovative Flexible Material Spooling & Coiling Solutions



INTEGRATED GRIPPER CUTTER

Additional Features Provided:

- Cutter and heavy-duty grippers
- Recipe Management - Programmable recipe management Ethernet or local flash drive. This allows customer to store product info to easily change programming for a number of products automatically.
- Pneumatic actuated release for material clamping device.
- CRS Tubing Guide Arms
- Allen-Bradley Controls Package - Controls and Servos
- Machine guarding
- Left to Right Configuration



ARTICULATE GUIDE SERVO AXIS



TRAVERSING STRETCH WRAP CARTRIDGE UP TO 21" WIDE



REPLACEABLE ENTRANCE PRODUCT GUIDES

MODEL / DIMENSIONS	ACT-16	ACT-26	ACT-36
MAX DIAMETER in (mm)	16 in (407 mm)	26 in (660 mm)	36 in (914 mm)
MAX WIDTH in (mm)	12 in (305 mm)	16 in (406 mm)	24 in (610 mm)
MAX WEIGHT lbs (kg)	50 lbs (23 kg)	150 lbs (68 kg)	400 lbs (181 kg)
HEIGHT*	80 in (2032 mm)	88 in (2235 mm)	107 in (2718 mm)
WIDTH**	64 in (1626 mm)	91 in (2311 mm)	112 in (2885 mm)
DEPTH***	64 in (1626 mm)	74 in (1880 mm)	94 in (2388 mm)

***Height** (how high the unit is in front of the operator) ****Width** (how wide the unit is in front of the operator) *****Depth** (how deep the unit is when viewing from the end)

REELPOWER INDUSTRIAL

5101 S. Council Road, Suite 100 • Okla. City, OK. 73179
405.672.0000 • 405.672.7200 Fax
www.reelpowerind.com