


# TM-100 TAPE WRAPPING SYSTEM

## *Integrated Puller*

This tape wrapping system was designed for high speed applications of Mylar, Teflon, Kapton, or metallic tapes for insulating and/or shielding aerospace, computer, and hook up wire and cables.

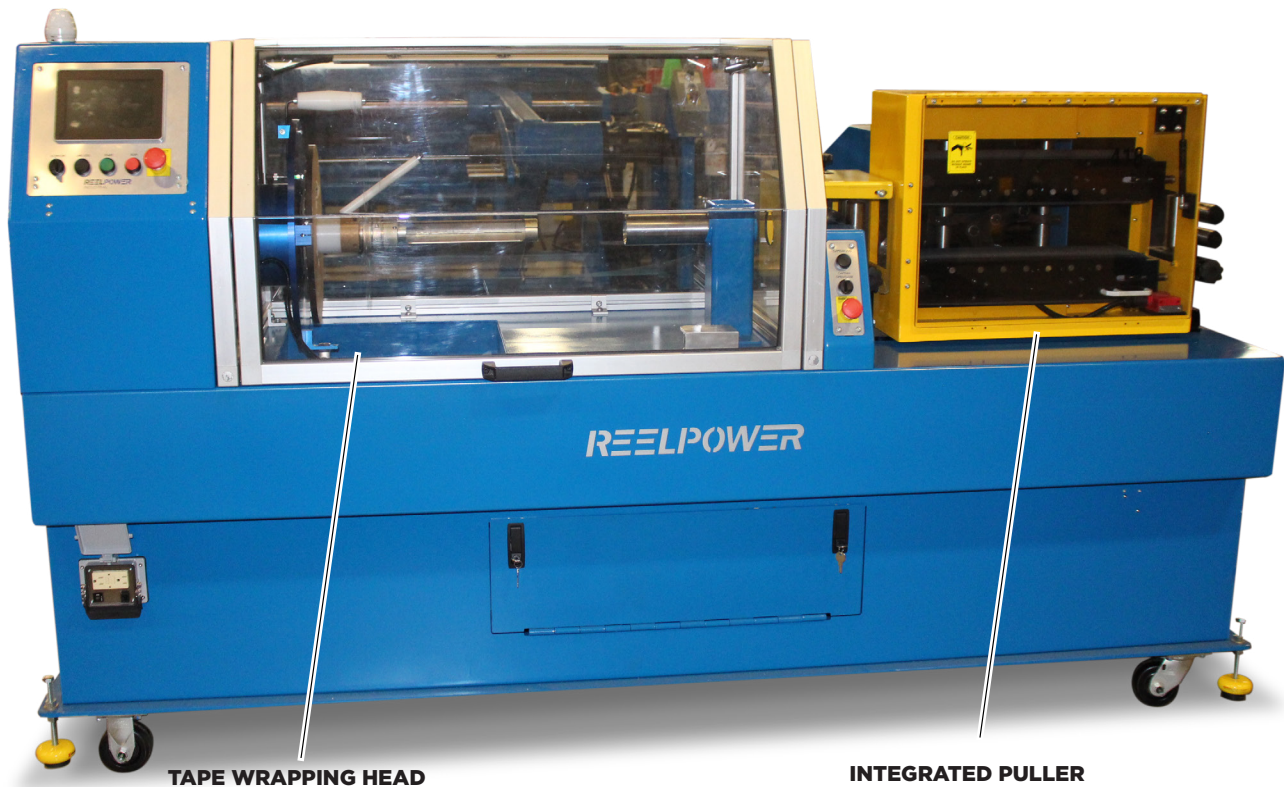

### STANDARD FEATURES

- Speed range from 0 - 1,500 RPM
- Core diameter up to 1.5"
- Single, dual head, and triple head systems
- Tape widths from 3/16" up to 2"
- Larger taping heads
- Different paint colors (custom)
- Taping machine without puller


# TM-100 TAPE WRAPPING SYSTEM

*Integrated Puller*




**EASY ACCESS MAINTENANCE PANELS**


- Predetermined footage counter for automatic shutdown at length
- AC Vector tape head and capstan motors
- Levelwind is regenerative controlled, electronically speed controlled
- 10" HMI standard
- Wider tape widths available on larger models
- Electric oven for curing of taped insulation
- Wire speed indicator FPM
- Head speed indicator RPM
- Tap pad ID 3" cop (min.) - 14" cop (max)
- Tape head brake and tension adjustment
- 230 Volt 3 Phase

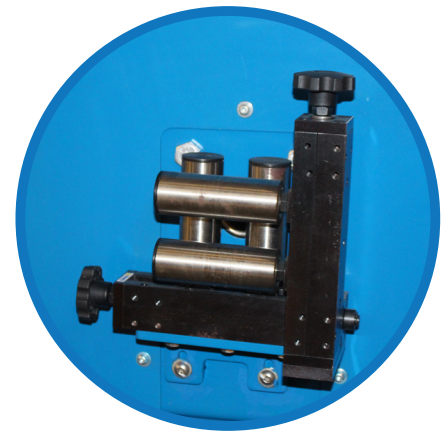

**INLET MATERIAL GUIDE**

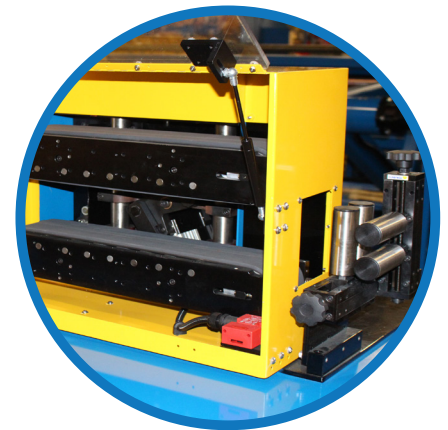

**PULLER AND EXIT MATERIAL GUIDE**

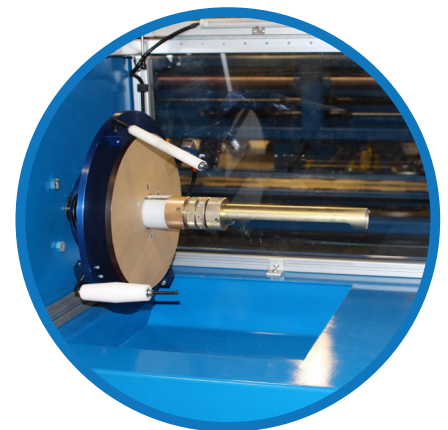

**TAPING HEAD**

**REELPOWER**  
INDUSTRIAL

5101 S. Council Road, Suite 100 • Okla. City, OK. 73179  
405.672.0000 • 405.672.7200 Fax  
[www.reelpowerind.com](http://www.reelpowerind.com)